



PRECAST STEPS WITH PLATFORM

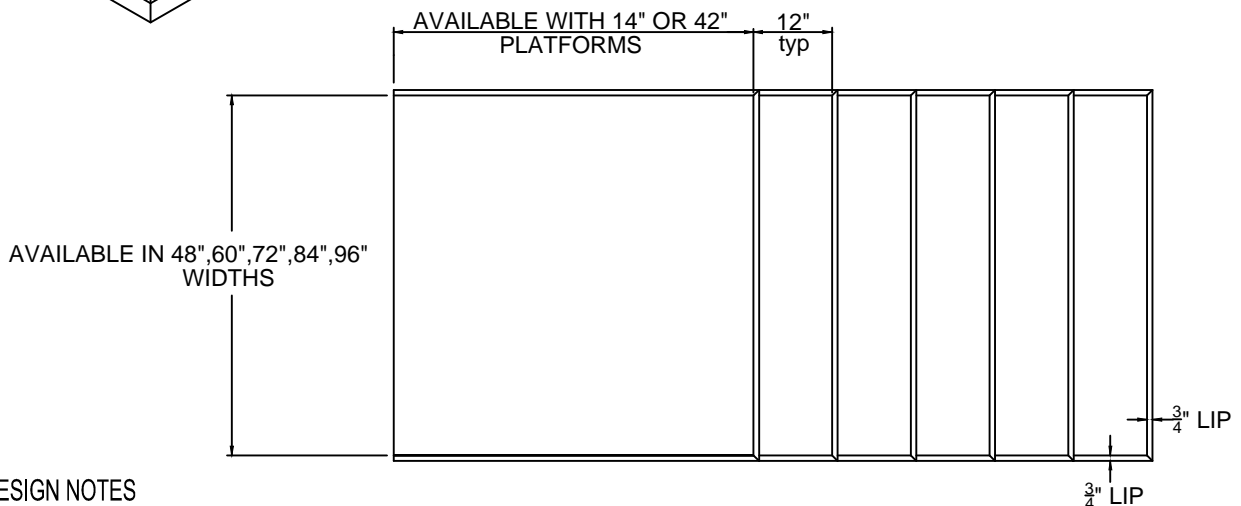

ELEVATION

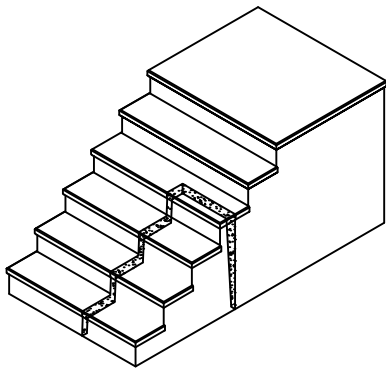

DESIGN NOTES

1. CONCRETE 5000 P.S.I -28 DAYS.
2. PRECAST STEPS ARE REINFORCED WITH 3/8" & 1/2" REBAR.
3. NON-SKID (BROOM) FINISH ON TREADS AND PLATFORM.
4. DO NOT USE SALT OR DE-ICERS ON CONCRETE STEPS.
5. BLACK WROUGHT IRON RAILINGS ARE AVAILABLE AS AN OPTIONAL ITEM.

PLAN



JOLLEY PRECAST INC.

1-800-582-4638

463 PUTNAM RD. DANIELSON CT 06239

www.jolleyprecast.com

FILE: PRECAST ENTRY STEPS