

ECOWATER
SYSTEMS®



Your Water. Perfected.

Let us

Perfect

your water and

Maximize

your peace of mind.

ETF2300ECCWS

ECOWATER CENTRAL CHLORAMINE/CHLORINE WATER SYSTEM

Proven System for Reducing Chloramines, Chlorine Tastes, Odors and Sediment

Great Tasting Water

Delivers great tasting, clean, filtered water to every faucet in your home.

Protects Plumbing

Prevents sediment particles from entering your home's plumbing system, protecting your pipes and appliances.

Catalytic Carbon

Filters the water throughout the home without compromising water flow. Removes chlorine taste and odor and eliminates the need for purchasing bottled water or future carbon filter changes.

Electronic Timer Controls with HydroLinkPlus® Wi-Fi and Smartphone App Monitoring

Wi-Fi enabled technology sends continuous and excessive water use, system error and service reminder alerts, including a water-to-drain sensing alert notifying you when an excessive amount of water is going to drain.

Water Meter

Allowing for chemical feed dosing, flow switch operation and water use information.

Multi-Wrap Fiberglass Reinforced Resin Tank

Durable tank liner will not deteriorate, rust, or corrode.

Environmentally Friendly Solution

- **No Salt or Added Chemicals** – Making it a great solution for areas with water or brine-discharge restrictions.
- **Low Water Usage** – Clean rinse cycle initiates only on the amount of water filtered, or after 14 days, whichever comes first.
- **No Replacement Filters Needed** – Means no replacement filters in the landfill.
- **No Need for Bottled Water** – Means no plastic water bottles in the landfill.

Energy Efficient Power Supply

Simplifies installation, maintenance and reduces electrical hazards.




Designed, Engineered &
Assembled in the U.S.A.

ecowater.com

ETF2300ECCWS

ECOWATER CENTRAL CHLORAMINE/
CHLORINE WATER SYSTEM

DIMENSIONS

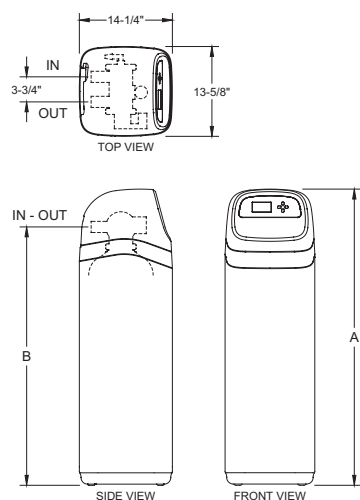

	ECCWS
Nominal Mineral Tank Size	10" Diam. x 35"
A	44 ³ / ₄ "
B	39 ¹ / ₄ "

SPECIFICATIONS

Rated Capacity (for a minimum of 34,000 gallons @ 10 gpm)	70% Removal of chloramines
Service Flow Rate	10 gpm (37.8 LPM)
Pressure Drop at Rated Service Flow	6 psi* (41.3 kPa)
Temperature Range (min./max.)	40 – 120°F / 5°C – 49°C
Water Pressure Limits (min./max.)	30 – 125 psi (206.8 - 861.8 kPa)
Catalytic Carbon (lbs.)	16
Quartz Gravel (lbs.)	6
Filter Sand (lbs.)	5
Maximum Clear Water Iron (ppm-Fe) ²	3
Electrical Requirement, 120V, 50/60Hz, (24V DC, 500 mA, power supply included)	

*From independent laboratory test data.



Your Water. Perfected.

MS2

