

Masking Tape



Intertape Masking Tape

IPG 513 – Utility Grade

- For non-critical room temperature applications.

IPG PG501 – General Grade

- For light masking and packaging applications.

IPG PG505 & 515 – Medium Grade

- Industry standard. Designed for paint contractors.

IPG PG29 & PG5 – Premium Grade

- Professional quality for the professional painter.
- Clean removal.



IPG 513 - Utility Grade

Stock Number	W x L	Mil	Temperature	Rolls/Case
T933513	1/2" x 60 yds.	5.0	Up to 150°F (30 min.)	72
T934513	3/4" x 60 yds.	5.0	Up to 150°F (30 min.)	48
T935513	1" x 60 yds.	5.0	Up to 150°F (30 min.)	36
T936513	1 1/2" x 60 yds.	5.0	Up to 150°F (30 min.)	24
T937513	2" x 60 yds.	5.0	Up to 150°F (30 min.)	24
T938513	3" x 60 yds.	5.0	Up to 150°F (30 min.)	16

IPG PG501 - General Grade

Stock Number	W x L	Mil	Temperature	Rolls/Case
T934501	3/4" x 60 yds.	6.5	Up to 200°F (30 min.)	48
T935501	1" x 60 yds.	6.5	Up to 200°F (30 min.)	36
T936501	1 1/2" x 60 yds.	6.5	Up to 200°F (30 min.)	24
T937501	2" x 60 yds.	6.5	Up to 200°F (30 min.)	24
T938501	3" x 60 yds.	6.5	Up to 200°F (30 min.)	16

IPG 515 - Medium Grade

Stock Number	W x L	Mil	Temperature	Rolls/Case
T933515	1/2" x 60 yds.	6.0	Up to 200°F (60 min.)	72
T934515	3/4" x 60 yds.	6.0	Up to 200°F (60 min.)	48
T935515	1" x 60 yds.	6.0	Up to 200°F (60 min.)	36
T936515	1 1/2" x 60 yds.	6.0	Up to 200°F (60 min.)	24
T937515	2" x 60 yds.	6.0	Up to 200°F (60 min.)	24
T938515	3" x 60 yds.	6.0	Up to 200°F (60 min.)	16

Intertape High Temperature Masking Tape

IPG PG16 – Premium Grade

- Designed for paint masking requiring adhesion to many different types of surfaces.
- Stain resistant and will remove clean when warm.

IPG PG21 – Performance Grade

- Extremely versatile and removes when warm or cold.
- Resistant to strong solvents and paints.



IPG PG16 - Premium Grade

Stock Number	W x L	Mil	Temperature	Rolls/Case
T93316	1/2" x 60 yds.	6.7	Up to 310°F (30 min.)	72
T93416	3/4" x 60 yds.	6.7	Up to 310°F (30 min.)	48
T93516	1" x 60 yds.	6.7	Up to 310°F (30 min.)	36
T93716	2" x 60 yds.	6.7	Up to 310°F (30 min.)	24

IPG PG21 - Performance Grade

Stock Number	W x L	Mil	Temperature	Rolls/Case
T93421	3/4" x 60 yds.	7.3	Up to 325°F (30 min.)	48
T93521	1" x 60 yds.	7.3	Up to 325°F (30 min.)	36
T93621	1 1/2" x 60 yds.	7.3	Up to 325°F (30 min.)	24
T93721	2" x 60 yds.	7.3	Up to 325°F (30 min.)	24

Intertape Colored Masking Tape

Medium crepe, paper masking tape coated with a pressure-sensitive rubber based adhesive.

- Designed for light-weight packaging, bag locking, decorative edging, marking and color coding.

IPG PF3 - Colored Masking Tape

Stock Number	W x L	Mil	Temperature	Rolls/Case
T934003*	3/4" x 60 yds.	5.7	Up to 150°F (30 min.)	48
T935003*	1" x 60 yds.	5.7	Up to 150°F (30 min.)	36
T937003*	2" x 60 yds.	5.7	Up to 150°F (30 min.)	24

* Choose from Black (B), Orange (O), White (W), Light Blue (H), Light Green (A), Red (R), Dark Green (E) or Yellow (Y).




Weatherable Masking Tape

3M 2090 – Long Mask™ Masking Tape

- Ideal for long term masking projects.
- Removes cleanly and easily for up to seven days without leaving a residue.

IPG PT14 – Weatherable Masking Tape

- Holds up to 14 days with clean removal.
- Solvent and moisture resistant.

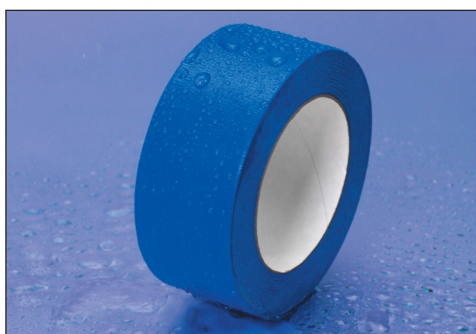

3M 2090 – Long Mask™ Weatherable Tape

Stock Number	W x L	Mil	UV Exposure	Rolls/Case
T9342090	3/4" x 60 yds.	5.0	7 Days	48
T9352090	1" x 60 yds.	5.0	7 Days	36
T9372090	2" x 60 yds.	5.0	7 Days	24

IPG PT14 – Weatherable Tape

Stock Number	W x L	Mil	UV Exposure	Rolls/Case
T935PT14	1" x 60 yds.	5.5	14 Days	36
T937PT14	2" x 60 yds.	5.5	14 Days	24

3M Masking Tape

2214 Scotch® – Utility Paper Tape

- Ideal for bundling and other non-critical masking jobs.

200 Tartan™ – Utility Paper Tape

- Used for holding, bundling, sealing or for non-critical masking applications.

2307 Highland™ – General Purpose

- Perfect for holding, bundling, sealing or general paint masking.

234 Scotch® – Heavy-Duty General Purpose

- Used in medium temperature paint baking applications.
- Features a smooth, crepe paper backing treated with a heat and solvent resistant saturant and a rubber adhesive.

232 Scotch® – High Performance

- An excellent professional painter's masking tape.
- Designed to be used in medium temperature paint baking applications.
- Features a smooth, crepe paper backing treated with a heat and solvent resistant saturant with a rubber adhesive.



2307 Highland™ – General Purpose

Stock Number	W x L	Mil	Temperature	Rolls/Case
T9332307	1/2" x 60 yds.	5.2	Up to 200°F (1 hour)	72
T9342307	3/4" x 60 yds.	5.2	Up to 200°F (1 hour)	48
T9352307	1" x 60 yds.	5.2	Up to 200°F (1 hour)	36
T9362307	1 1/2" x 60 yds.	5.2	Up to 200°F (1 hour)	24
T9372307	2" x 60 yds.	5.2	Up to 200°F (1 hour)	24
T9382307	3" x 60 yds.	5.2	Up to 200°F (1 hour)	12

2214 Scotch® – Utility Paper Tape

Stock Number	W x L	Mil	Temperature	Rolls/Case
T9332214	1/2" x 60 yds.	5.2	Up to 150°F (30 min.)	72
T9342214	3/4" x 60 yds.	5.2	Up to 150°F (30 min.)	48
T9352214	1" x 60 yds.	5.2	Up to 150°F (30 min.)	36
T9362214	1 1/2" x 60 yds.	5.2	Up to 150°F (30 min.)	24
T9372214	2" x 60 yds.	5.2	Up to 150°F (30 min.)	24
T9382214	3" x 60 yds.	5.2	Up to 150°F (30 min.)	12

234 Scotch® – Heavy-Duty General Purpose

Stock Number	W x L	Mil	Temperature	Rolls/Case
T933234	1/2" x 60 yds.	6.0	Up to 250°F (1 hour)	72
T934234	3/4" x 60 yds.	6.0	Up to 250°F (1 hour)	48
T935234	1" x 60 yds.	6.0	Up to 250°F (1 hour)	36
T936234	1 1/2" x 60 yds.	6.0	Up to 250°F (1 hour)	24
T937234	2" x 60 yds.	6.0	Up to 250°F (1 hour)	24
T938234	3" x 60 yds.	6.0	Up to 250°F (1 hour)	12

200 Tartan™ – Utility Paper Tape

Stock Number	W x L	Mil	Temperature	Rolls/Case
T933200	1/2" x 60 yds.	4.4	Up to 200°F (30 min.)	72
T934200	3/4" x 60 yds.	4.4	Up to 200°F (30 min.)	48
T935200	1" x 60 yds.	4.4	Up to 200°F (30 min.)	36
T936200	1 1/2" x 60 yds.	4.4	Up to 200°F (30 min.)	24
T937200	2" x 60 yds.	4.4	Up to 200°F (30 min.)	24
T938200	3" x 60 yds.	4.4	Up to 200°F (30 min.)	12

232 Scotch® – High Performance

Stock Number	W x L	Mil	Temperature	Rolls/Case
T933232	1/2" x 60 yds.	6.3	Up to 250°F (1 hour)	72
T934232	3/4" x 60 yds.	6.3	Up to 250°F (1 hour)	48
T935232	1" x 60 yds.	6.3	Up to 250°F (1 hour)	36
T936232	1 1/2" x 60 yds.	6.3	Up to 250°F (1 hour)	24
T937232	2" x 60 yds.	6.3	Up to 250°F (1 hour)	24
T938232	3" x 60 yds.	6.3	Up to 250°F (1 hour)	12

3M High Temperature Masking Tape

Treated with a heat and solvent resistant saturant suitable for most applications.

2380 Scotch® – High Temperature

Stock Number	W x L	Mil	Temperature	Rolls/Case
T9332380	1/2" x 60 yds.	7.5	Up to 325°F (30 min.)	72
T9342380	3/4" x 60 yds.	7.5	Up to 325°F (30 min.)	48
T9352380	1" x 60 yds.	7.5	Up to 325°F (30 min.)	36
T9372380	2" x 60 yds.	7.5	Up to 325°F (30 min.)	24
T9382380	3" x 60 yds.	7.5	Up to 325°F (30 min.)	12



3M Automotive Refinishing Masking Tape

Balanced construction for applications where clean removal and conformability are required.

233+ Scotch® – Automotive Refinishing

Stock Number	W x L	Mil	Temperature	Rolls/Case
T933233	1/2" x 60 yds.	6.7	Up to 250°F (30 min.)	48
T934233	3/4" x 60 yds.	6.7	Up to 250°F (30 min.)	48
T935233	1" x 60 yds.	6.7	Up to 250°F (30 min.)	24
T937233	2" x 60 yds.	6.7	Up to 250°F (30 min.)	12
T938233	3" x 60 yds.	6.7	Up to 250°F (30 min.)	8




Double Sided Masking Tape

3M 410M Premium Grade

- Ideal for bonding together a wide variety of materials such as rubbers, metals, wood, glass, papers, paints, and many plastics.
- Crepe paper tape with a double coated natural rubber adhesive.
- Widely used in the printing industry for splicing.

IPG 592 – Industrial Grade

- Features an extremely aggressive tack.
- Ideal for many industrial uses such as mounting, adhering and bonding applications.

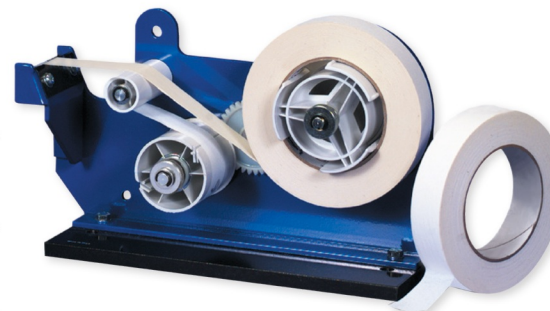

3M 410M – Premium Grade

Stock Number	W x L	Mil	Rolls/Case
T955410	1" x 36 yds.	6.0	36
T957410	2" x 36 yds.	6.0	24

IPG 592 – Industrial Grade

Stock Number	W x L	Mil	Rolls Per Case
T955592	1" x 36 yds.	5.4	36
T957592	2" x 36 yds.	5.4	24

More sizes and styles available! Call us today for more information!