


# 2000 GALLON TWO COMPARTMENT H-20 WEST WARWICK GREASE TRAP

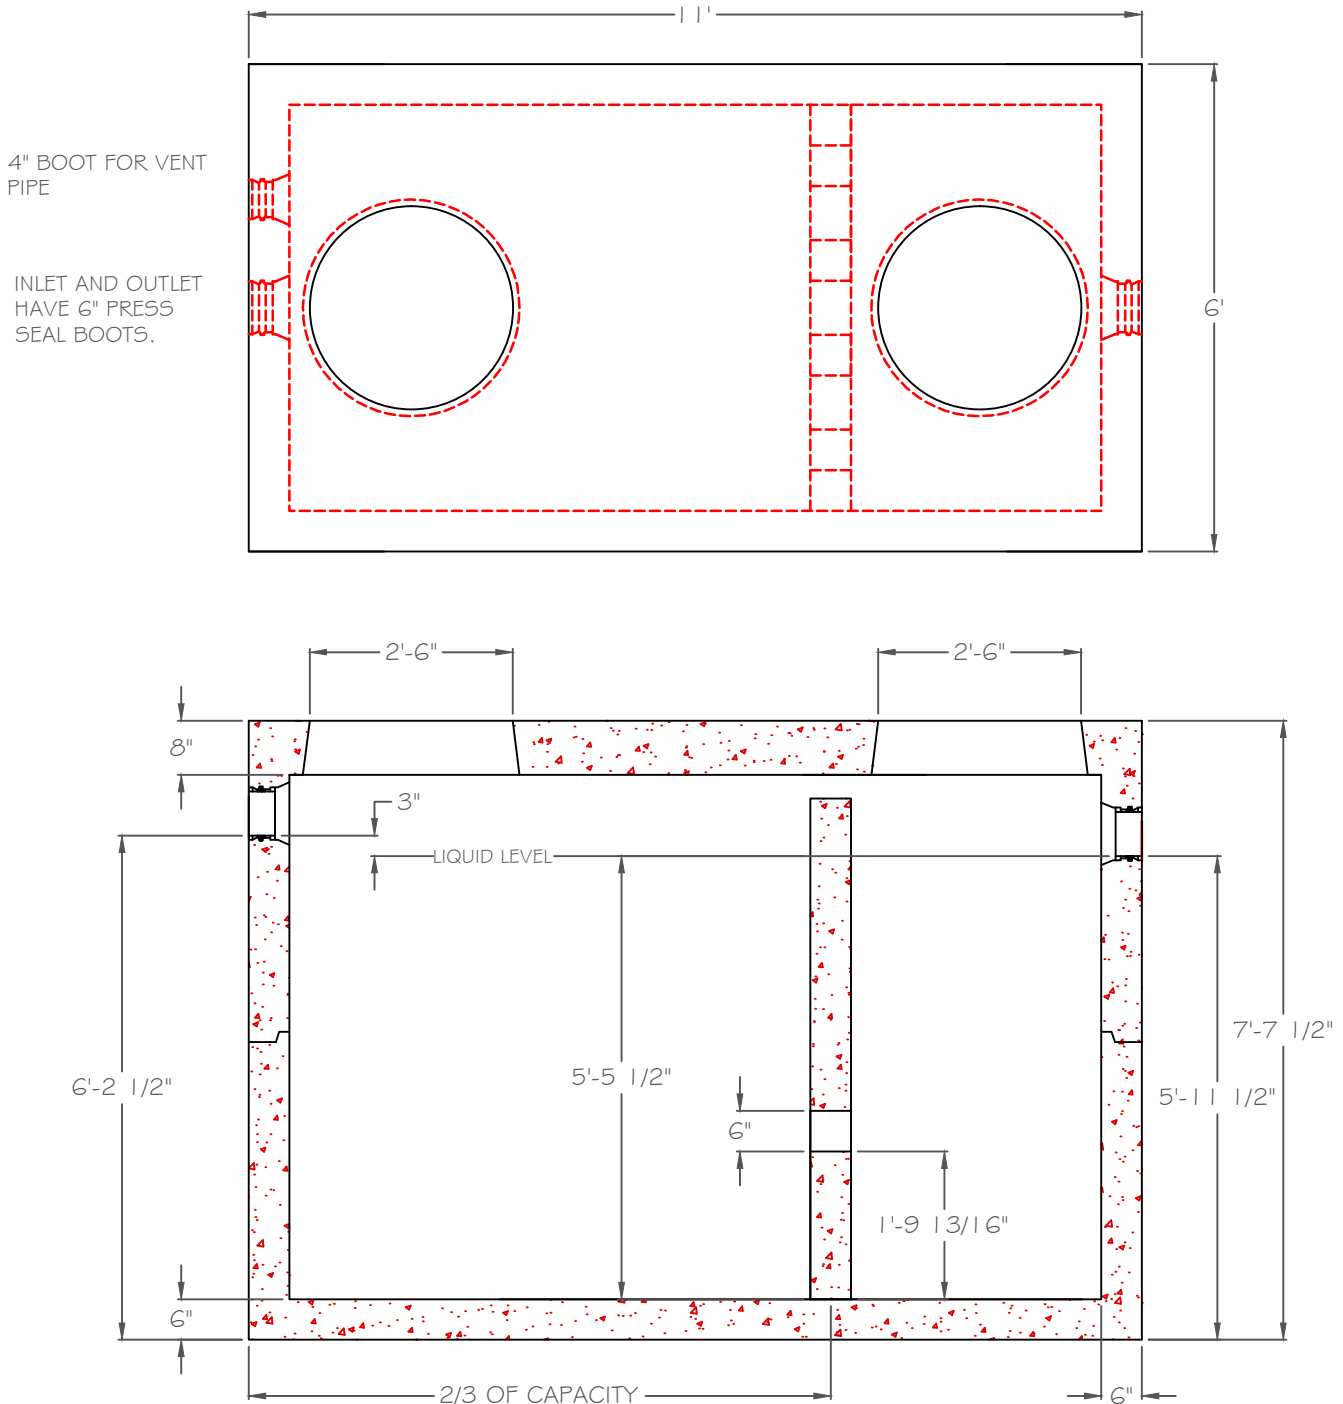

## DESIGN NOTES:

- 1) ALL JOINTS ARE SEALED WITH BUTYL RUBBER SEALANT.
- 2) ALL INLETS AND OUTLETS HAVE WATER TIGHT STATE APPROVED SEALS
- 3) EXTERIOR COATED WITH BITUMINOUS SEALANT
- 4) MEETS CURRENT ASTM C 1227
- 5) CONCRETE STRENGTH 5000 PSI MIN. AT 28 DAYS
- 6) MEETS H-20 WHEEL LOAD REQUIREMENTS.
- 7) REBAR: ASTM A-615 GRADE 60

463 PUTNAM RD DANIELSON CT 06239  
www.jolleyprecast.com



**JOLLEY PRECAST INC.**  
**1-800-582-4638**