


1500 GALLON TWO COMPARTMENT SEPTIC TANK



DESIGN NOTES:

- 1) ALL JOINTS SEALED WITH BUTYL RUBBER SEALANT
- 2) ALL INLETS AND OUTLETS HAVE STATE APPROVED SEALS
- 3) AVAILABLE OUTLET FILTER CARTRIDGE SHOWN
- 4) MEETS CURRENT ASTM C 1227
- 5) CONCRETE STRENGTH 5000 PSI MIN. AT 28 DAYS

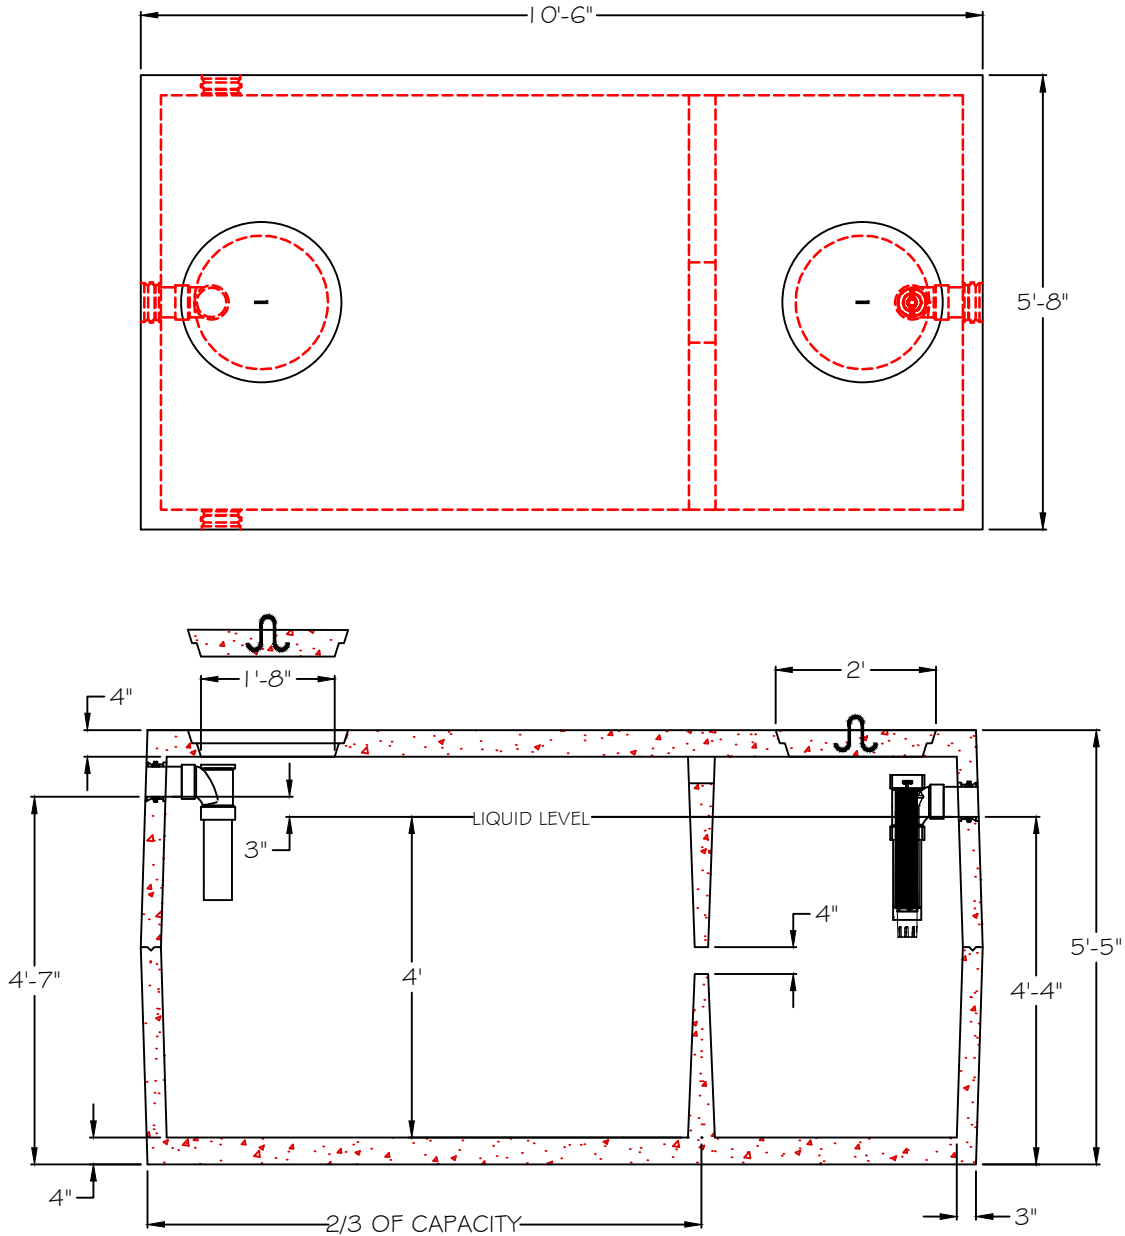

JOLLEY PRECAST INC.
1-800-582-4638