


2000 GALLON TWO COMPARTMENT MASSACHUSETTS SEPTIC TANK



DESIGN NOTES:

- 1) ALL JOINTS SEALED WITH BUTYL RUBBER SEALANT
- 2) ALL INLETS AND OUTLETS HAVE STATE APPROVED SEALS
- 3) AVAILABLE OUTLET FILTER SHOWN
- 4) MEETS CURRENT ASTM C 1227
- 5) CONCRETE STRENGTH 5000 PSI MIN. AT 28 DAYS

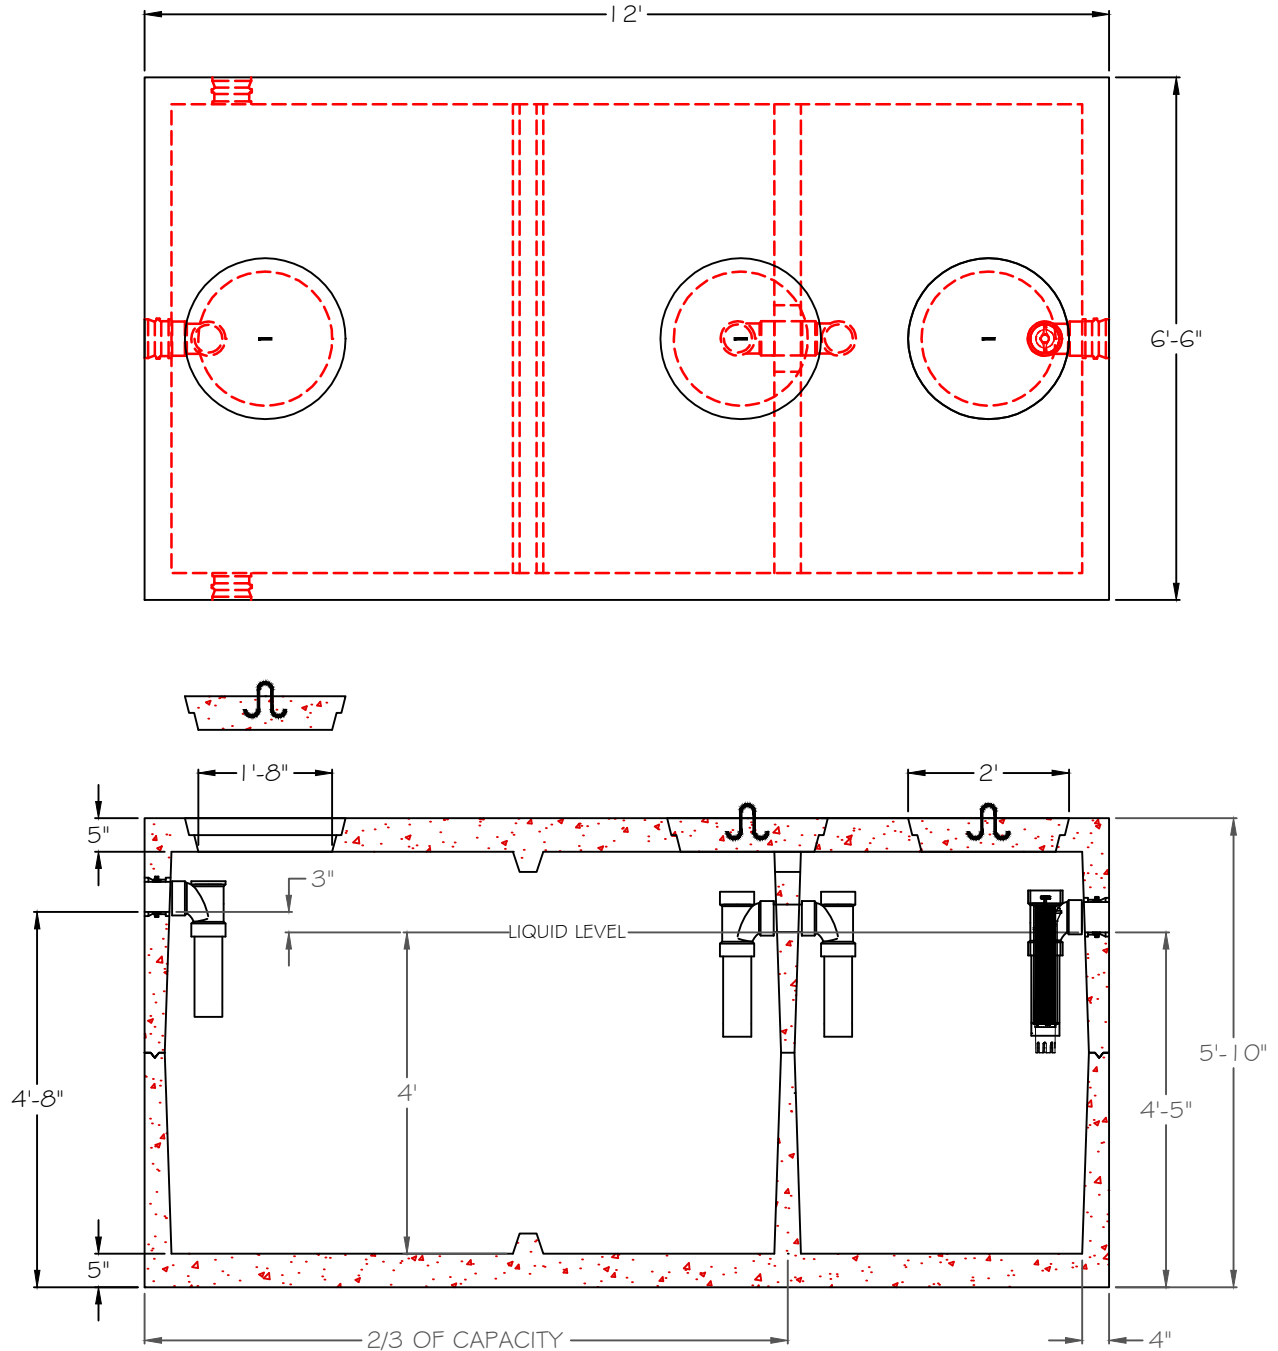

463 PUTNAM RD DANIELSON CT 06239
www.jolleyprecast.com

JOLLEY PRECAST INC.
1-800-582-4638