

PRECAST STEPS

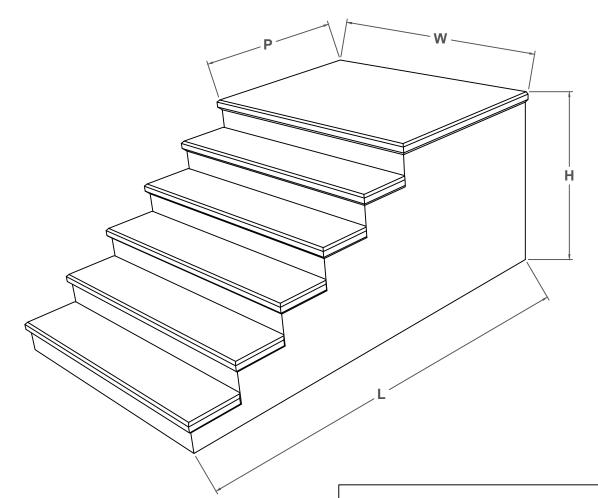



DESIGN NOTES

- 1) OPTIONAL WROUGHT IRON RAILINGS ARE AVAILABLE FOR ALL SIZES.
- 2) TREADS AND PLATFORM HAVE A NON-SKID BROOM FINISH.
- * 3) 7 AND 8 RISERS ARE AVAILABLE IN 5' WIDE.
- ** 4) CLOSED BACK FOR SIDE ENTRY AVAILABLE IN 4' WIDE WITH A 60" PLATFORM.
 - 5) CONCRETE HAS A MINIMUM STRENGTH OF 5000 P.S.I. @ 28 DAYS.
 - 6) DO NOT USE SALT OR DE-ICERS ON CONCRETE STEPS.

MEASUREMENTS

W AVAILABLE IN 4', 5', 6', 7', AND 8' WIDE

. , , ,				
# OF	Н	L LENGTH		
RISERS	HEIGHT	14" PLAT	42" PLAT	**60" PLAT
1	7"	14"	42"	
2	14"	26"	54"	72"
3	21"	38"	66"	84"
4	28"	50"	78"	96"
5	35"	62"	90"	108"
6	42"	74"	102"	120"
* 7	49"	86"	114"	
* 8	56"	98"	126"	

