



2500 GALLON TWO COMPARTMENT OSI SEPTIC TANK

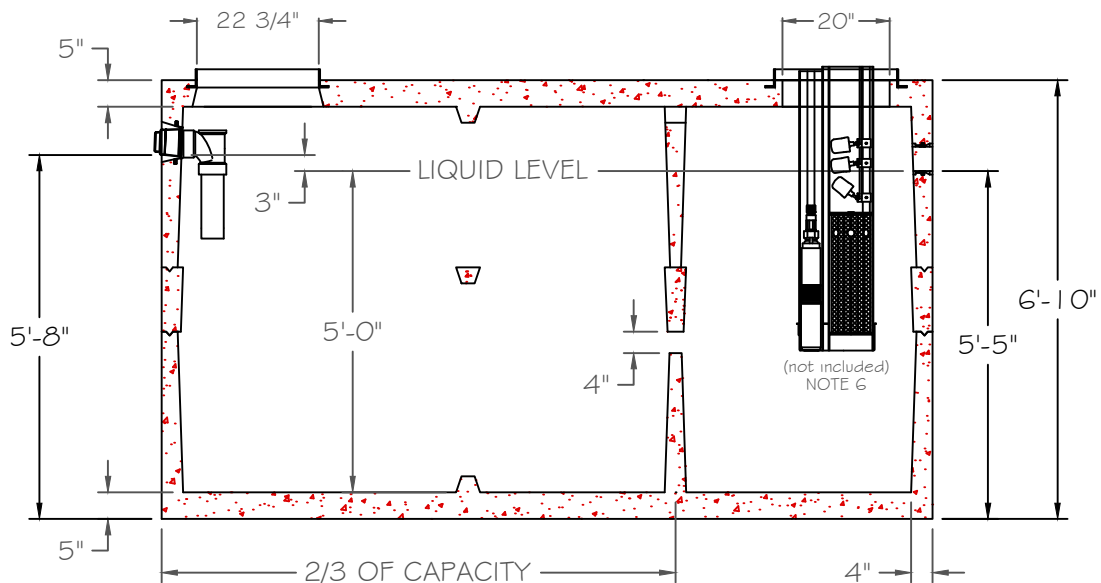

DESIGN NOTES:

- 1) ALL JOINTS SEALED WITH BUTYL RUBBER SEALANT
- 2) ALL INLETS AND OUTLETS HAVE STATE APPROVED SEALS
- 3) TANK INCLUDES CAST IN PLACE 24" OSI RISER ADAPTERS
- 4) MEETS CURRENT ASTM C 1227
- 5) CONCRETE STRENGTH 5000 PSI MIN. AT 28 DAYS
- 6) TANK WILL ACCEPT OSI BIOTUBE® FILTER, NOT INCLUDED.
- 7) REBAR: ASTM A-615 GRADE 60

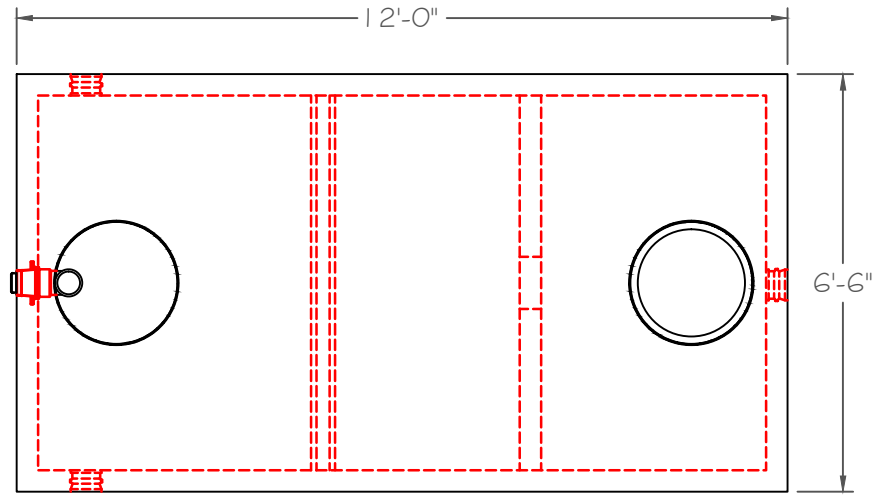

JOLLEY PRECAST INC.

1-800-582-4638

463 PUTNAM RD. DANIELSON CT 06239

www.jolleyprecast.com

FILE: 2500-2C-OSI